

CP SERIES FILTRATION SYSTEMS

CP213f OD

Kinetico's CP Series filtration systems are highly efficient systems which are designed to be environmentally responsible. These systems are completely configurable based on volume and application requirements, and can be combined with CP Series Softening Systems.

How are the CP Series Filtration Systems different?

- **Non-Electric.** Powered by the kinetic energy of moving water. Reliable, no timers or computers to set, adjust, repair or replace.
- **Multi-Tank System.** Unlimited supply of clean, filtered water. Best for high flow rates.
- **Corrosion-Resistant Valve and Tanks.** Long lasting and can endure even the harshest environments.
- **Backwash with Treated Water.** Enhanced cleaning results in improved water quality and longer media life.
- **Filtration Options:**
 - Carbon Filtration media provides removal of chlorine and odors.
 - Calcite Filtration media increases the alkalinity of your water.
 - Macrolite® Filtration media is specified when fine pre-filtration is critical. This innovative media is used to remove particles as small as five microns. Provides effective elimination of iron and other particulates.



Over 40 Years
Experience



Non-Electric



Multi-Tank System



Corrosion-Resistant
Valve and Tanks




Backwash with
Treated Water



Filtration Options

CP SERIES FILTRATION SYSTEMS

CP213f OD

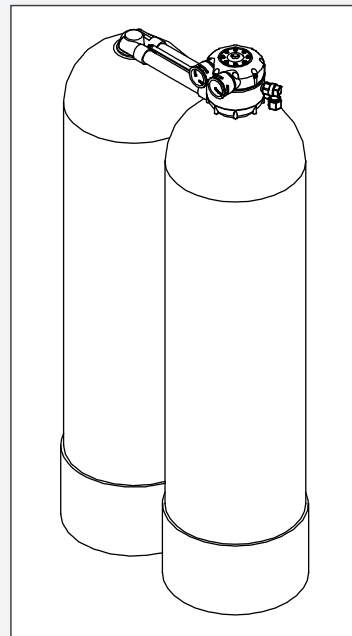

Specifications	CP213f OD
Tank Size	13" x 54"
System Size (width x depth x height)	27" x 13" x 60"
Media Volume	2 ft ³
Service Flow Range (15 / 30 psig)	15.0-20.0 gpm
Optimal Media Flow Rate (Service)	10 gpm
Temperature Range	35° to 125° F